

LID OPENING



Unplug power supply before any maintenance.




Unclip the lid by levering each tank lateral clip with a flat screwdriver.



Pull up the lid.



Unclip the cable sheath by pressing it with the thumb.

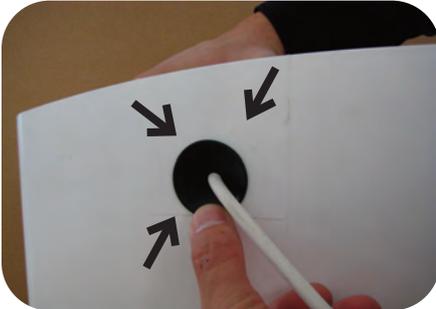

Pull out the motor block.




BASKET & CUTTER REMOVAL

Unclip the basket lid by a simple rotation thanks to a flat screwdriver.



With the flat screwdriver unclip the basket from the motor cover's hooks.

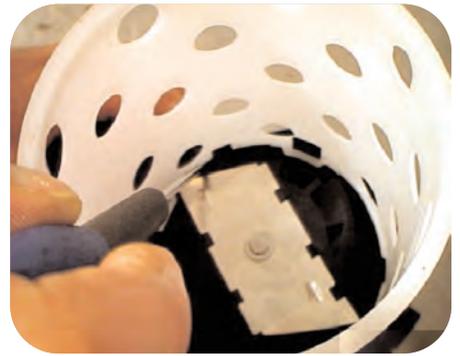

Thanks to a flat pinch, unclip the circlip of the cutter.



Lever the cutter and its support thanks to 2 screw drivers.



PRESSURE CHAMBER DISMOUNTING

Work with the motor positioned upside down (cutter down).



Unclip the membrane half-clips with a flat screwdriver.




Put off the membrane.




Unclip both sides of the pressure chamber base with a flat.




Pull it with the electrical equipment.

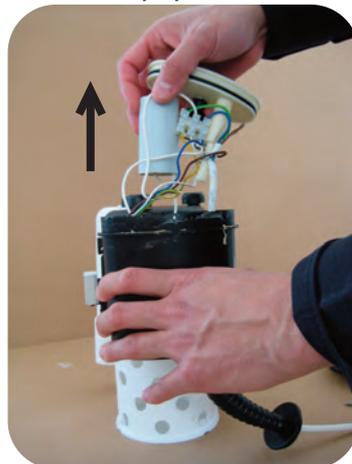

Verify the correct connections of the wires in the junction block.

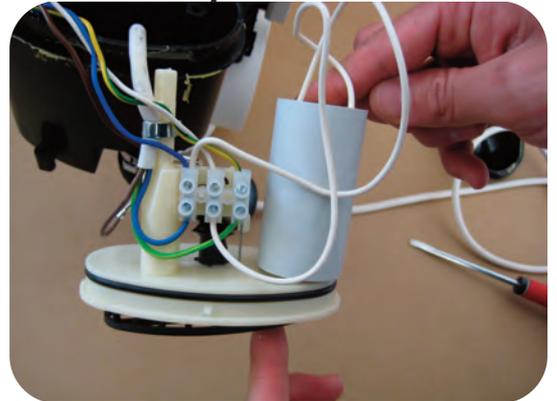

Verify the correct clipping of the switch.

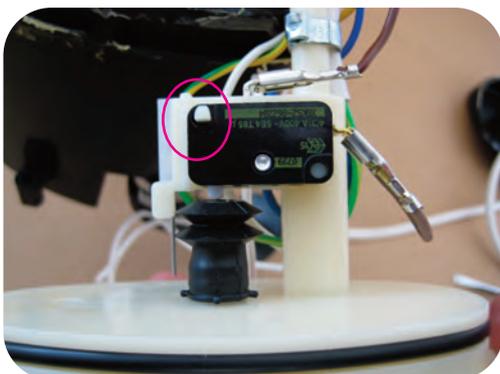


Verify the correct position of the grille:

good




not good

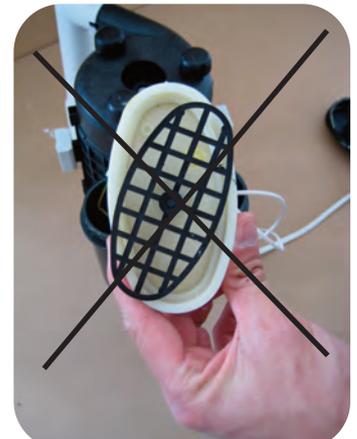


PRESSURE CHAMBER REMOUNTING

Unclip the cable sheath metalclip with a flat.

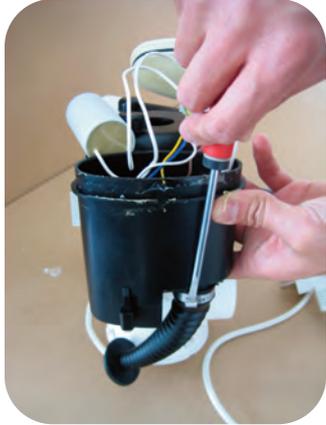

Insert the electric equipment back (beware not to squeeze the cables).

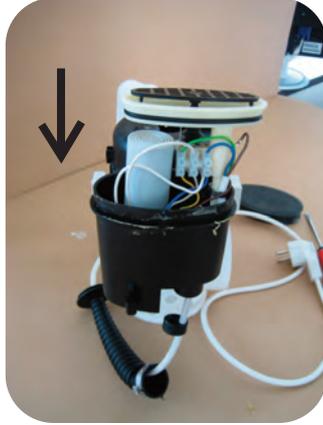

Put back the black rubber round gasket.



Use a simple rod to guide the position of the gasket: the free hole should correspond to the chimney / vent below.



Remount the cable sheath and its metal clip.



Tight the metal clip with an adapted pinch.



Remount the membrane (beware to respect the lateral guide).



Position the 2 half-clips BETWEEN the membrane and the pressure chamber.



Respect the correct mounting side (chamfer).



Click back the 2 half-clips with a pinch.



Press the membrane to check the free movement and correct switch clicking/ activation.



PUMP CHAMBER & IMPELLER

Unclip the discharge elbow from the pump chamber.



Unclip the pump body by rotating clockwise.



Verify that the small hole of the pressure chamber is not blocked.



By maintaining the cutter (BEWARE!) unscrew the impeller anti-clockwise. Take out the washer.



Verify that nothing is jammed in the axis / in the impeller.



Screw back the impeller with washer and remount the pump body (respect the mistake-proofing).



Clip back the discharge elbow thanks to its clip.



REMOUNTING THE PUMP

Insert the motor block in the tank (follow the tank guides).



Reconnect the cable sheath carefully to the tank.




Remount the cover on the lid. Beware to the correspondance of the discharge pipes (upper and lower parts).

Verify the correct position of the lid gasket.



*NB : you can use dishwashing soap to ease the closing of the lid.
BEWARE: NO GREASE.*

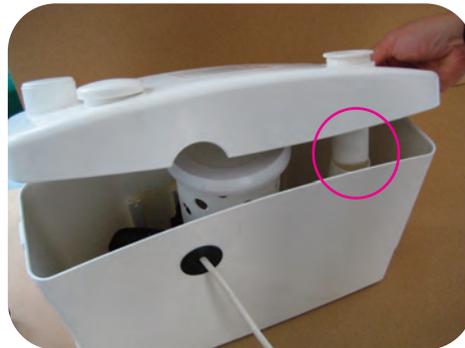

Verify that the upper discharge pipe is not pinched.



Push back the discharge elbow COMPLETELY and secure the assembly with a screw clamp.



Eventually change the carbon filter.



Opening/closing of the lateral plugs (1/4 turn).

